

GUNNEBO INDUSTRIES

Lifting Points



LiftingPlus
Hijsen met visie

liftingplus.nl



QUALITY



SAFETY



PERFORMANCE

We improve efficiency

Gunnebo Industries was founded in 1764 in Gunnebo, a town located in the south of Sweden. In the very beginning the company forged nails and bolts for ship-making, but soon expanded to manufacturing of chains and lifting products.

The secret of being in business for over 250 years, and still going strong, is by constantly improving our products and solutions to meet our customers' needs. This has been Gunnebo Industries' beacon since the very start. We take great pride in our heritage and it has provided us with an industry experience that is hard to come by, and all of it comes to the greater good for our customers, distributors and partners.

To meet our customers' needs is of course not only about developing new products; it is also about giving advice for difficult operations or improvements on existing products. With our range of lifting points we can provide complete solutions developed for each customer's needs that will improve operational efficiency.

Choosing the right lifting point for your operation can be a challenge since most lifting points can be used for several purposes. In order to give some guidance, and to share what we consider to be best practice, we have created a cross-chart that provide indications to which lifting point that might be best suited for your specific purpose.



	RELP	RLP	DLP	BLP
Tight space	✓		✓	✓
Limited height (effective length)	✓	✓		
Vertical lift	✓	✓		✓
Angular lift		✓	✓	✓
Vertical rotation under load				✓
Tilting under load		✓	✓	✓
Sensitive load surface				✓
Single part lift	✓	✓		✓
Multiple part lift		✓	✓	✓
Integrated combination (hook or link)		✓		
RFID prepared		✓	✓	✓

This chart is intended to give guidance in choosing the right lifting point for your operation and is not rules for usage. For advice contact your closest Gunnebo Industries dealer.

Rotating Eye Lifting Point - RELP

The RELP is a compact and robust Lifting Point, ideal for top-mounting and when it is important to have quick and easy on-hooking. The bolt has a hexagon socket which makes it easy to mount and dismount but an even better feature is the marking. On the bolt itself, the Working Load Limit, mounting torque and manufacturing ID is stamped so it's always available for the operator.

The RELP will automatically adjust to the loading direction which decreases the risk to load it incorrectly and endangering the lifting operation. It also offers a Working Load Limit several times higher than the standard DIN 580 eye bolt, allowing for use of a smaller Lifting Point or higher capacity using the same thread size. For sensitive load surfaces the RELP is ideal, as the connecting sling hook will be positioned mainly parallel to the load surface, thus completely avoiding the hook causing damage on impact on the load.

Each RELP sold have been proof loaded to 2.5 times the Working Load Limit and visually inspected by a licensed inspector. This is according to our knowledge and experience the most reliable method to detect possible deviations on the product or in the production process. We don't gamble with safety! All Gunnebo Industries Lifting Points are CE-marked.



Working Load Limits* RELP

Symmetric Load (tonnes)	1		2		2 symmetric		3 & 4 symmetric		Tightening torque	Allen key		
	No. of legs	Angle β	No. of legs	Angle β	0-45°	45-60°	0-45°	45-60°				
REL P - M8 x 1.25	0.7	0°	0.3	90°	1.4	0.6	0.4	0.3	0.6	0.4	10 Nm	8 mm
REL P 5/16"-18 UNC	0.7	0°	0.3	90°	1.4	0.6	0.4	0.3	0.6	0.4	7 Ft.Lbs	5/16"
REL P - M10 x 1.5	1.2	0°	0.5	90°	2.4	1.0	0.7	0.5	1.0	0.7	15 Nm	8 mm
REL P 3/8"-16 UNC	1.2	0°	0.5	90°	2.4	1.0	0.7	0.5	1.0	0.7	11 Ft.Lbs	5/16"
REL P - M12 x 1.75	2.0	0°	0.8	90°	4.0	1.6	1.1	0.8	1.6	1.2	27 Nm	8 mm
REL P 1/2"-13 UNC	2.0	0°	0.8	90°	4.0	1.6	1.1	0.8	1.6	1.2	20 Ft.Lbs	5/16"
REL P - M16 x 2	3.5	0°	1.5	90°	7.0	3.0	2.1	1.5	3.1	2.2	60 Nm	8 mm
REL P 5/8"-11 UNC	3.5	0°	1.5	90°	7.0	3.0	2.1	1.5	3.1	2.2	44 Ft.Lbs	5/16"
REL P - M20 x 2.5	6.1	0°	2.4	90°	12.2	4.8	3.3	2.4	5.0	3.6	90 Nm	8 mm
REL P 3/4"-10 UNC	5.0	0°	2.3	90°	10.0	4.6	3.1	2.3	4.8	3.4	66 Ft.Lbs	5/16"
REL P 7/8"-9 UNC	6.1	0°	2.9	90°	12.2	5.8	4.1	2.9	6.1	4.3	66 Ft.Lbs	5/16"
REL P - M24 x 3	8.1	0°	3.3	90°	16.2	6.6	4.6	3.3	6.9	4.9	135 Nm	19 mm
REL P 1"-8 UNC	8.1	0°	3.3	90°	16.2	6.6	4.6	3.3	6.9	4.9	100 Ft.Lbs	3/4"
REL P - M30 x 3.5	12.1	0°	4.6	90°	24.2	9.2	6.4	4.6	9.6	6.9	270 Nm	19 mm
REL P 1 1/4"-7 UNC	12.1	0°	4.6	90°	24.2	9.2	6.4	4.6	9.6	6.9	200 Ft.Lbs	3/4"
REL P - M36 x 4	16.1	0°	7.1	90°	32.2	14.2	9.9	7.1	14.9	10.6	320 Nm	19 mm
REL P 1 1/2"-6 UNC	16.1	0°	7.1	90°	32.2	14.2	9.9	7.1	14.9	10.6	236 Ft.Lbs	3/4"
REL P - M42 x 4.5	24.0	0°	9.1	90°	48.0	18.2	12.7	9.1	19.1	13.6	600 Nm	19 mm
REL P 1 3/4"-5 UNC	24.0	0°	9.1	90°	48.0	18.2	12.7	9.1	19.1	13.6	440 Ft.Lbs	3/4"
REL P - M48 x 5	32.0	0°	12.1	90°	64.0	24.2	16.9	12.1	25.4	18.1	800 Nm	19 mm
REL P 2"-4.5 UNC	32.0	0°	12.1	90°	64.0	24.2	16.9	12.1	25.4	18.1	590 Ft.Lbs	3/4"

* Safety factor 4:1

Rotating Eye Lifting Point RELP

CE

Art. no.	Code	Dimensions in mm										Weight kg
		B	C	D	E	H	L	L1	M	Y	Z	
Z102408	REL P-M8 x 1.25	28	28	11	40	14	15	42	8	50	29	0.2
Z102410	REL P-M10 x 1.5	28	28	11	40	14	15	42	10	50	29	0.2
Z102412	REL P-M12 x 1.75	32	33	13	46	13	20	47	12	58	38	0.3
Z102416	REL P-M16 x 2	39	41	15	53	16	24	57	16	70	40	0.5
Z102420	REL P-M20 x 2.5	42	43	16	60	18	30	60	20	78	46	0.7
Z102424	REL P-M24 x 3	50	51	19	68	20	36	71	24	88	44	1.1
Z102430	REL P-M30 x 3.5	60	62	26	85	28	45	90	30	112	64	2.4
Z102436	REL P-M36 x 4	72	72	32	97	32	54	104	36	136	74	4.1
Z102442	REL P-M42 x 4.5	82	82	38	120	37	63	119	42	158	91	6.7
Z102448	REL P-M48 x 5	94	96	43	142	39	72	135	48	180	102	9.9


Bolt according to: ISO 898-1 Class 10.9

REL P with UNC thread



CE

Art. no.	Code	Dimensions in m										M inch	Weight kg
		B	C	D	E	H	L	L1	Y	Z			
Z102508	REL P 5/16"-18 UNC	28	28	11	40	14	15	42	50	29	5/16"	0.2	
Z102510	REL P 3/8"-16 UNC	28	28	11	40	14	15	42	50	29	3/8"	0.2	
Z102512	REL P 1/2"-13 UNC	32	33	13	46	13	20	47	58	38	1/2"	0.3	
Z102516	REL P 5/8"-11 UNC	39	41	15	53	16	24	57	70	40	5/8"	0.5	
Z102520	REL P 3/4"-10 UNC	42	43	16	60	18	30	60	78	46	3/4"	0.7	
Z102521	REL P 7/8"-9 UNC	42	43	16	60	18	30	60	78	46	7/8"	0.7	
Z102524	REL P 1"-8 UNC	50	51	19	68	20	36	71	88	44	1"	1.1	
Z102530	REL P 1 1/4"-7 UNC	60	62	26	85	28	45	90	112	64	1 1/4"	2.4	
Z102536	REL P 1 1/2"-6 UNC	72	72	32	97	32	54	104	136	74	1 1/2"	4.1	
Z102542	REL P 1 3/4"-5 UNC	82	82	38	120	37	63	119	158	91	1 3/4"	6.8	
Z102548	REL P 2"-4.5 UNC	94	96	43	142	39	72	135	180	102	2"	10.0	



Bolt according to: ISO 898-1 Class 10.9

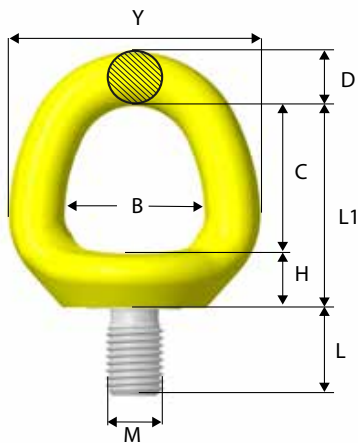

User advice


 Instructions are available on our website gunneboindustries.com.


Make sure the hook does not lie against the load surface during lift.



Never side-load the RELP.

Measurements in mm unless other is stated

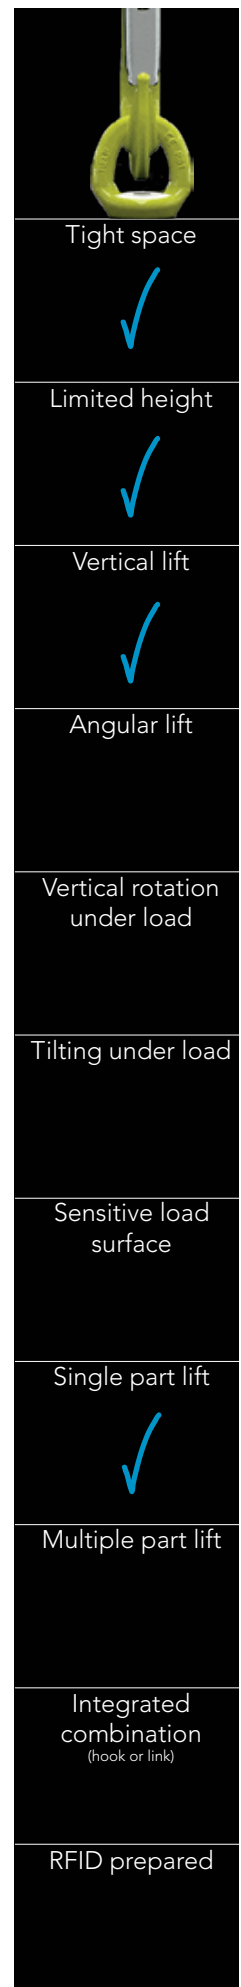


- Tight space ✓
- Limited height ✓
- Vertical lift ✓
- Angular lift
- Vertical rotation under load
- Tilting under load
- Sensitive load surface
- Single part lift ✓
- Multiple part lift
- Integrated combination (hook or link)
- RFID prepared

Rotating Lifting Point - RLP

The RLP has a dismantable D-ring to enable assembly of roundsling, master link or hook directly onto the Lifting Point. The disassembly of the RLP is made easy by just folding the D-ring forward and push down.

RLP has a hexagon bolt to make it easy to disassemble/assemble with a wrench. The bolt is also clearly marked with Working Load Limit, mounting torque and manufacturer ID so it's always available to the operator. The RLP rotates 360° and pivots 180°, making it strong, flexible and reliable.

Each RLP sold have been proof loaded to 2.5 times the Working Load Limit and visually inspected by a licensed inspector. This is according to our knowledge and experience the most reliable method to detect possible deviations on the product or in the production process. We don't gamble with safety! All Gunnebo Industries Lifting Points are CE-marked.

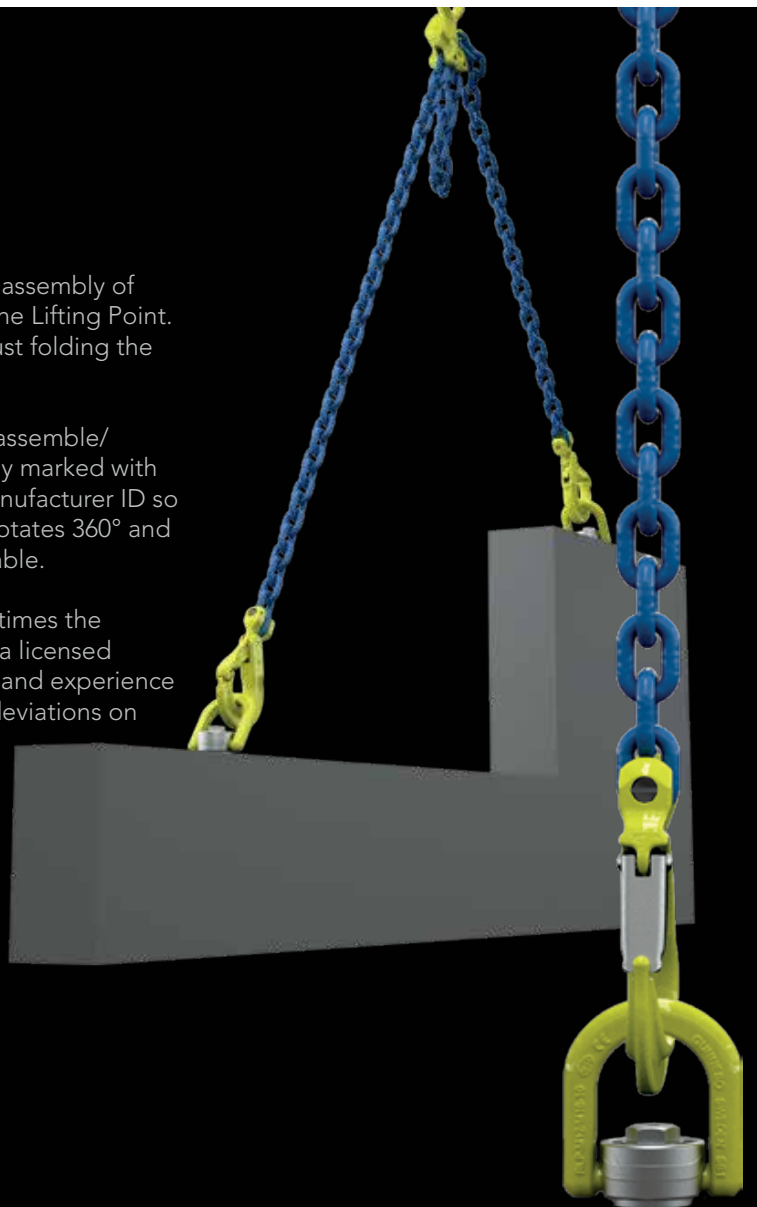

Working Load Limits* RLP

Symmetric Load (tonnes)									Tightening torque	Spanner size
	No. of legs	1	1	2	2	2 symmetric	2 symmetric	3 & 4 symmetric		
Angle β	0°	90°	0°	90°	0-45°	45-60°	0-45°	45-60°		
RLP - M8 x 1.25	0.8	0.4	1.6	0.8	0.5	0.4	0.8	0.6	10 Nm	13 mm
RLP 5/16"-18 UNC	0.8	0.4	1.6	0.8	0.5	0.4	0.8	0.6	7 Ft.Lbs	1/2"
RLP - M10 x 1.5	1.2	0.7	2.4	1.4	0.9	0.7	1.4	1.0	15 Nm	13 mm
RLP 3/8"-16 UNC	1.2	0.65	2.4	1.3	0.9	0.6	1.3	0.9	11 Ft.Lbs	1/2"
RLP - M12 x 1.75	2.0	1.2	4.0	2.4	1.6	1.2	2.5	1.8	27 Nm	24 mm
RLP 1/2"-13 UNC	2.0	1.2	4.0	2.4	1.6	1.2	2.5	1.8	20 Ft.Lbs	15/16"
RLP - M16 x 2	3.2	2.0	6.4	4.0	2.8	2.0	4.2	3.0	60 Nm	24 mm
RLP 5/8"-11 UNC	3.2	2.0	6.4	4.0	2.8	2.0	4.2	3.0	44 Ft.Lbs	15/16"
RLP - M20 x 2.5	5.6	2.8	11.2	5.6	3.9	2.8	5.8	4.2	90 Nm	32 mm
RLP 3/4"-10 UNC	5.0	2.5	10.0	5.0	3.5	2.5	5.2	3.7	66 Ft.Lbs	1 5/16"
RLP 7/8"-9 UNC	5.6	2.8	11.2	5.6	3.9	2.8	5.8	4.2	66 Ft.Lbs	1 5/16"
RLP - M24 x 3	8.0	4.6	16.0	9.2	6.4	4.6	9.6	6.9	135 Nm	32 mm
RLP 1"-8 UNC	8.0	4.6	16.0	9.2	6.4	4.6	9.6	6.9	100 Ft.Lbs	1 5/16"
RLP - M30 x 3.5	12.0	6.0	24.0	12.0	8.4	6.0	12.6	9.0	270 Nm	55 mm
RLP 1 1/4"-7 UNC	12.0	6.0	24.0	12.0	8.4	6.0	12.6	9.0	200 Ft.Lbs	2 1/4"
RLP - M36 x 4	14.0	8.0	28.0	16.0	11.2	8.0	16.8	12.0	320 Nm	55 mm
RLP 1 1/2"-6 UNC	14.0	8.0	28.0	16.0	11.2	8.0	16.8	12.0	236 Ft.Lbs	2 1/4"
RLP - M42 x 4.5	16.0	14.0	32.0	28.0	19.6	14.0	29.4	21.0	600 Nm	75 mm
RLP 1 3/4"-5 UNC	16.0	14.0	32.0	28.0	19.6	14.0	29.4	21.0	440 Ft.Lbs	3"
RLP - M48 x 5	20.0	16.0	40.0	32.0	22.4	16.0	33.6	24.0	800 Nm	75 mm
RLP 2"-4.5 UNC	20.0	16.0	40.0	32.0	22.4	16.0	33.6	24.0	590 Ft.Lbs	3"

* Safety factor 4:1

Rotating Lifting Point RLP

CE

Art. no. standard bolt length	L	Art. no. long bolt length**	L2	Code	B	C	Dimensions in mm						Weight kg***
							D	L1	M	X	Y	Z	
Z101708	16	Z1017080L	101	RLP-M8 x 1.25	42	35	12	62	8	27	64	Ø40	0.3
Z101710	16	Z1017100L	101	RLP-M10 x 1.5	42	35	12	62	10	27	64	Ø40	0.3
Z101712	25	Z1017120L	120	RLP-M12 x 1.75	57	46	19	88	12	42	91	Ø54	1.0
Z101716	25	Z1017160L	160	RLP-M16 x 2	57	46	19	88	16	42	91	Ø54	1.0
Z101720	36	Z1017200L	200	RLP-M20 x 2.5	83	55	28	110	20	55	133	Ø80	2.9
Z101724	36	Z1017240L	240	RLP-M24 x 3	83	55	28	110	24	55	133	Ø80	2.9
Z101730	58	Z1017300L	300	RLP-M30 x 3.5	114	70	34	148	30	78	182	Ø111	7.1
Z101736	58	Z1017360L	300	RLP-M36 x 4	114	70	34	148	36	78	182	Ø111	7.3
Z101742	81	Z1017420L	301	RLP-M42 x 4.5	149	91	40	190	42	99	229	Ø142	14.3
Z101748	81	Z1017480L	301	RLP-M48 x 5	149	91	40	190	48	99	229	Ø142	14.5

** Long bolt supplied with nut and washer. *** Weight is calculated with standard bolt length.

Bolt, nut and washer according to: ISO 898-1 Class 10.9


RLP with UNC thread

CE

Art. no. standard bolt length	L	Art. no. long bolt length**	L2	Code	B	C	Dimensions in mm						Weight kg***
							D	L1	X	Y	Z	M inch	
Z101808	16	Z1018080L	101	RLP-5/16"-18 UNC	42	35	12	62	27	64	Ø40	5/16"	0.3
Z101810	16	Z1018100L	101	RLP-3/8"-16 UNC	42	35	12	62	27	64	Ø40	3/8"	0.3
Z101812	25	Z1018120L	120	RLP-1/2"-13 UNC	57	46	19	88	42	91	Ø54	1/2"	1.0
Z101816	25	Z1018160L	160	RLP-5/8"-11 UNC	57	46	19	88	42	91	Ø54	5/8"	1.0
Z101820	36	Z1018200L	200	RLP-3/4"-10 UNC	83	55	28	110	55	133	Ø80	3/4"	2.9
Z101821	36	Z1018210L	200	RLP-7/8"-9 UNC	83	55	28	110	55	133	Ø80	7/8"	2.9
Z101824	36	Z1018240L	240	RLP 1"-8 UNC	83	55	28	110	55	133	Ø80	1"	2.9
Z101830	58	Z1018300L	300	RLP 1 1/4"-7 UNC	114	70	34	148	78	182	Ø111	1 1/4"	7.1
Z101836	58	Z1018360L	300	RLP 1 1/2"-6 UNC	114	70	34	148	78	182	Ø111	1 1/2"	7.3
Z101842	81	Z1018420L	301	RLP 1 3/4"-5 UNC	149	91	40	190	99	229	Ø142	1 3/4"	14.4
Z101848	81	Z1018480L	301	RLP 2"-4.5 UNC	149	91	40	190	99	229	Ø142	2"	14.7

** Long bolt supplied with nut and washer. *** Weight is calculated with standard bolt length.


Bolt, nut and washer according to: ISO 898-1 Class 10.9

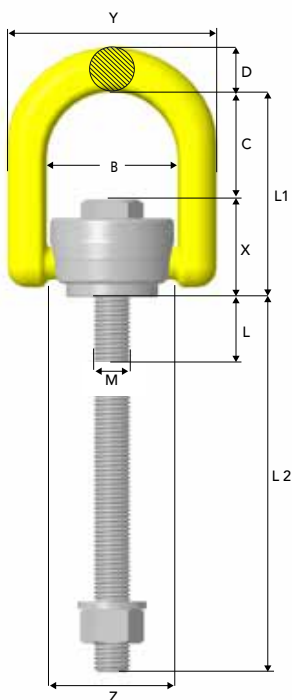


Disassembly of the RLP is easily done by just folding the D-ring forward and push down.

User advice

Instructions are available on our website gunneboindustries.com.

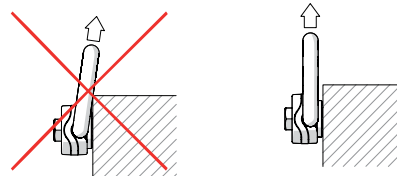


Make sure the D-ring does not lie against the load surface during lift.

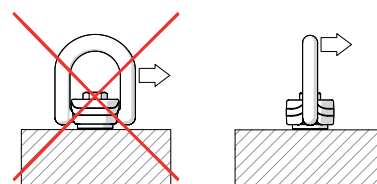

Never side-load the RLP.

Measurements in mm unless other is stated

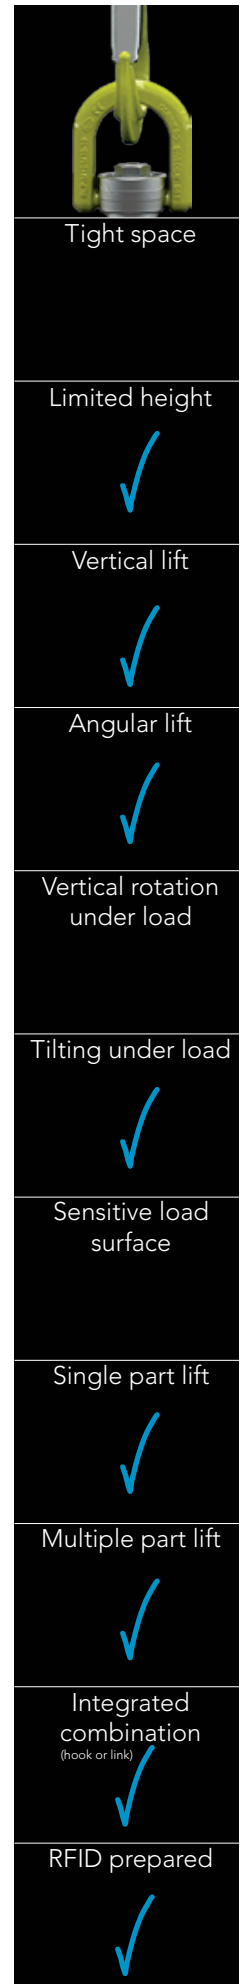


De-centered Lifting Point - DLP

The design of the DLP allows the link to be folded over the housing when idle, allowing the Lifting Point to be almost completely stowed away when not in use. The closed, oblong link is also equipped with a "stay-up"-function for easy on-hooking, especially when there is limited space. This saves both the load from damage due to impacts from the hook, as well as making rigging fast and easy.

The DLP is ideal in narrow spaces, such as corners or edge position, as the housing has a compact design. The bolt is also clearly marked with Working Load Limit, mounting torque and manufacturer ID so it's always available to the operator.

Each DLP sold have been proof loaded to 2.5 times the Working Load Limit and visually inspected by a licensed inspector. This is according to our knowledge and experience the most reliable method to detect possible deviations on the product or in the production process. We don't gamble with safety! All Gunnebo Industries Lifting Points are CE-marked.

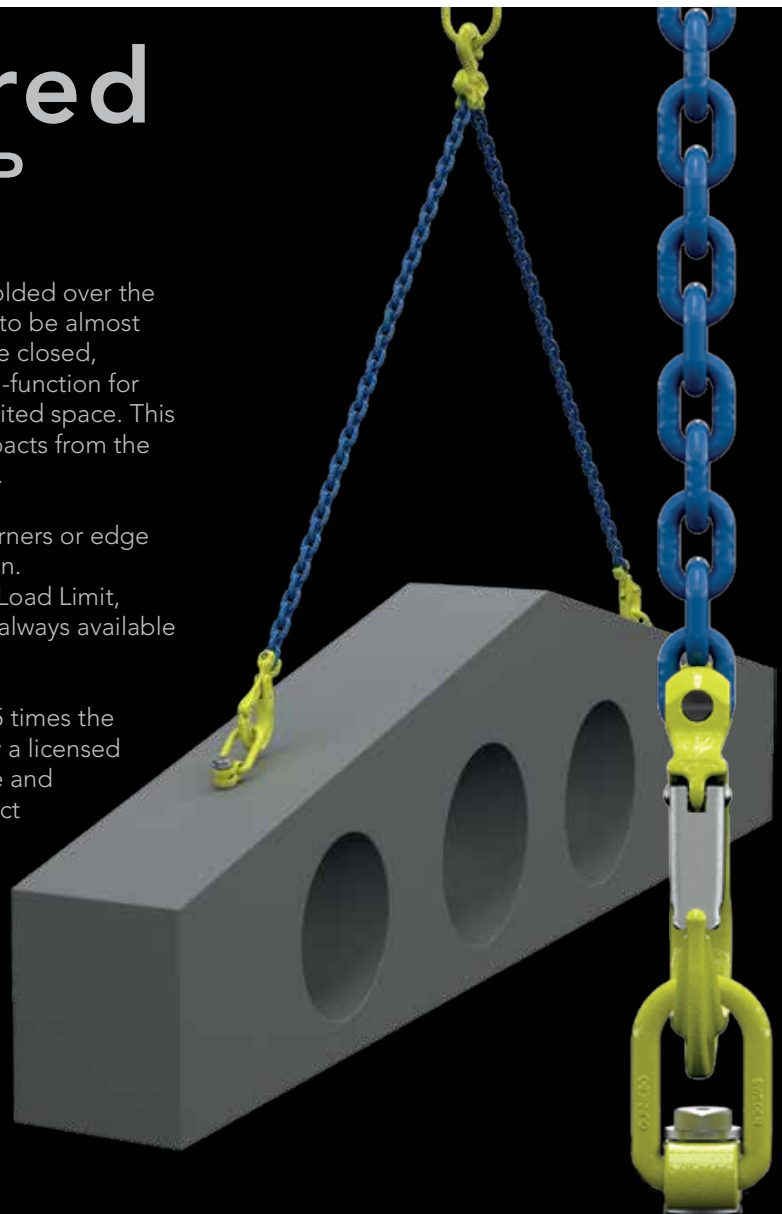

Working Load Limits* DLP

	Symmetric Load (tonnes)				Tightening torque		Spanner size	
	1	2	2 symmetric	3 & 4 symmetric	0-45°	45-60°		
Angle β	$0^\circ < \beta < 90^\circ$	$0^\circ < \beta < 90^\circ$	0-45°	45-60°	0-45°	45-60°		
DLP -M8 x 1.25	0.35	0.70	0.5	0.35	0.7	0.5	10 Nm	13 mm
DLP 5/16"-18 UNC	0.35	0.70	0.5	0.35	0.7	0.5	7 Ft.Lbs	1/2"
DLP -M10 x 1.5	0.65	1.30	0.9	0.65	1.4	1.0	15 Nm	13 mm
DLP 3/8"-16 UNC	0.60	1.20	0.8	0.60	1.3	1.0	11 Ft.Lbs	1/2"
DLP -M12 x 1.75	1.0	2.0	1.4	1.0	2.1	1.5	27 Nm	24 mm
DLP 1/2"-13 UNC	1.0	2.0	1.4	1.0	2.1	1.5	20 Ft.Lbs	15/16"
DLP -M16 x 2	1.8	3.6	2.5	1.8	3.7	2.7	60 Nm	24 mm
DLP 5/8"-11 UNC	1.6	3.2	2.2	1.6	3.3	2.4	44 Ft.Lbs	15/16"
DLP -M20 x 2.5	2.6	5.2	3.5	2.6	5.4	3.9	90 Nm	32 mm
DLP -3/4"-10 UNC	2.2	4.4	3.0	2.2	4.6	3.3	66 Ft.Lbs	1 5/16"
DLP -7/8"-9 UNC	2.6	5.2	3.5	2.6	5.4	3.9	66 Ft.Lbs	1 5/16"
DLP -M24 x 3	4.1	8.2	5.7	4.1	8.6	6.1	135 Nm	32 mm
DLP -1"-8 UNC	4.1	8.2	5.7	4.1	8.6	6.1	100 Ft.Lbs	1 5/16"
DLP -M30 x 3.5	5.0	10.0	7.0	5.0	10.5	7.5	270 Nm	55 mm
DLP -1 1/4"-7 UNC	5.0	10.0	7.0	5.0	10.5	7.5	200 Ft.Lbs	2 1/4"
DLP -M36 x 4	7.0	14.0	9.8	7.0	14.7	10.5	320 Nm	55 mm
DLP -1 1/2"-6 UNC	7.0	14.0	9.8	7.0	14.7	10.5	236 Ft.Lbs	2 1/4"
DLP -M42 x 4.5	15.0	30.0	21.0	15.0	31.5	22.5	600 Nm	75 mm
DLP -1 3/4"-5 UNC	15.0	30.0	21.0	15.0	31.5	22.5	440 Ft.Lbs	3"
DLP -M48 x 5	20.0	40.0	28.0	20.0	42.0	30.0	800 Nm	75 mm
DLP -2"-4.5 UNC	20.0	40.0	28.0	20.0	42.0	30.0	590 Ft.Lbs	3"

* Safety factor 4:1

De-centered Lifting Point DLP



Art. no. standard bolt length	L	Art.no. long bolt length**	L2	Code	Dimensions in mm												Weight kg***
					B	C	D	E	F	G	L1	M	X	Y	Z		
Z102208	13	Z1022080L	97.5	DLP-M8 x 1.25	35	48	10	39	14	10	78	8	30	55	26	0.3	
Z102210	13	Z1022100L	97.5	DLP -M10 x 1.5	35	48	10	39	14	10	78	10	30	55	26	0.3	
Z102212	23	Z1022120L	118	DLP -M12 x 1.75	35	48	12	51	20	14	91	12	44	59	32	0.5	
Z102216	23	Z1022160L	158	DLP-M16 x 2	35	48	12	51	20	14	91	16	44	59	32	0.5	
Z102220	34	Z1022200L	198	DLP-M20 x 2.5	54	88	18	71	28	18	145	20	58	90	48	1.6	
Z102224	34	Z1022240L	238	DLP-M24 x 3	54	88	18	71	28	18	145	24	58	90	48	1.7	
Z102230	53	Z1022300L	295	DLP-M30 x 3.5	82	94	26	104	39	27	182	30	88	122	75	5.0	
Z102236	53	Z1022360L	295	DLP-M36 x 4	82	94	26	104	39	27	182	36	88	122	75	5.2	
Z102242	73	Z1022420L	293	DLP-M42 x 4.5	100	104	36	136	54	34	216	42	113	156	110	11.6	
Z102248	73	Z1022480L	293	DLP-M48 x 5	100	103	36	136	54	34	216	48	113	156	110	11.9	

** Long bolt supplied with nut and washer. *** Weight is calculated with standard bolt length.

Bolt, nut and washer according to: ISO 898-1 Class 10.9



DLP with UNC thread



Art. no. standard bolt length	L	Art.no. long bolt length**	L2	Code	Dimensions in mm												M inch	Weight kg***
					B	C	D	E	F	G	L1	X	Y	Z				
Z102308	13	Z1023080L	97.5	DLP-5/16"-18 UNC	35	48	10	39	14	10	78	30	55	26	5/16"	0.3		
Z102310	13	Z1023100L	97.5	DLP-3/8"-16 UNC	35	48	10	39	14	10	78	30	55	26	3/8"	0.3		
Z102312	23	Z1023120L	118	DLP-1/2"-13 UNC	35	48	12	51	20	14	91	44	59	32	1/2"	0.5		
Z102316	23	Z1023160L	158	DLP-5/8"-11 UNC	35	48	12	51	20	14	91	44	59	32	5/8"	0.5		
Z102320	34	Z1023200L	198	DLP-3/4"-10 UNC	54	88	18	71	28	18	145	58	90	48	3/4"	1.6		
Z102321	34	Z1023210L	198	DLP-7/8"-9 UNC	54	88	18	71	28	18	145	58	90	48	7/8"	1.6		
Z102324	34	Z1023240L	238	DLP-1"-8 UNC	54	88	18	71	28	18	145	58	90	48	1"	1.7		
Z102330	53	Z1023300L	295	DLP- 1 1/4"-7 UNC	82	94	26	104	39	27	182	88	122	75	1 1/4"	5.5		
Z102336	53	Z1023360L	295	DLP-1 1/2"-6 UNC	82	94	26	104	39	27	182	88	122	75	1 1/2"	5.7		
Z102342	73	Z1023420L	293	DLP-1 3/4"-5 UNC	100	103	36	136	54	34	216	113	156	110	1 3/4"	11.7		
Z102348	73	Z1023480L	293	DLP-2"- 4.5 UNC	100	103	36	136	54	34	216	113	156	110	2"	12.1		


** Long bolt supplied with nut and washer. ***Weight is calculated with standard bolt length.

Bolt, nut and washer according to: ISO 898-1 Class 10.9

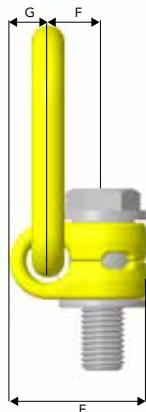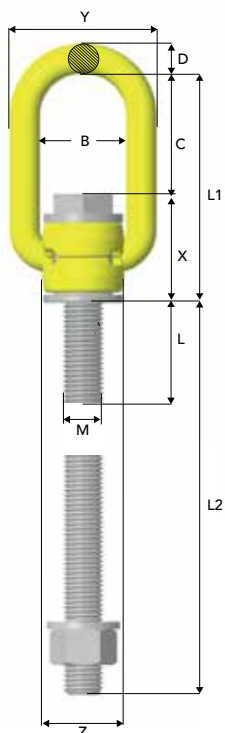


User advice

Instructions are available on our website gunneboindustries.com.




- The DLP can only be loaded from 0° to 110° degrees.
- Rotation around screw axis when loaded at 0 -15° degrees is not allowed.

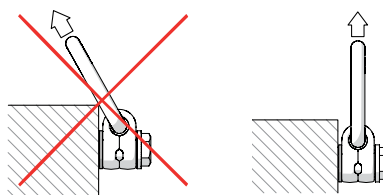

Make sure the D-ring does not lie against the load surface during lift.

Measurements in mm unless other is stated



Tight space ✓

Limited height

Vertical lift

Angular lift ✓

Vertical rotation under load

Tilting under load ✓

Sensitive load surface

Single part lift

Multiple part lift ✓

Integrated combination (hook or link) ✓

RFID prepared ✓

Ball-bearing Lifting Point - BLP

The BLP is a very versatile Lifting Point and can safely be used for most applications. The ball-bearings in the BLP allow the load to be rotated during the lift, which is especially good when maintenance is needed on heavy tools and other types of equipment.

If the load surface is sensitive to impacts or scratches, the BLP is a good choice as it builds out from the load which makes it less likely that the lifting equipment will come in contact with it causing damage.

The housing of the BLP has a hexagon shape for easy mounting and dismounting and is also clearly marked with Working Load Limit, mounting torque and manufacturer ID so it's always available to the operator.

Each BLP sold have been proof loaded to 2.5 times the Working Load Limit and visually inspected by a licensed inspector. This is according to our knowledge and experience the most reliable method to detect possible deviations on the product or in the production process. We don't gamble with safety! All Gunnebo Industries Lifting Points are CE-marked.



Working Load Limits* BLP

Symmetric Load (tonnes)											Tightening torque	Spanner size
	No. of legs	1	1	2	2	2 symmetric		2	3 & 4 symmetric			
	Angle β	0°	90°	0°	90°	0-45°	45-60°	0-45°	0-45°	45-60°		
BLP -M8 x 1.25		0.6	0.3	1.2	0.6	0.4	0.3	0.4	0.6	0.45	10 Nm	36 mm
BLP -5/16"-18 UNC		0.6	0.3	1.2	0.6	0.4	0.3	0.4	0.6	0.45	7 Ft.Lbs	1 1/2"
BLP -M10 x 1.5		1.0	0.5	2.0	1.0	0.7	0.5	0.7	1.3	0.75	15 Nm	36 mm
BLP -3/8"-16 UNC		0.8	0.4	1.6	0.8	0.5	0.4	0.5	0.8	0.60	11 Ft.Lbs	1 1/2"
BLP -M12 x 1.75		1.5	0.75	3.0	1.5	1.1	0.75	1.1	1.5	1.1	27 Nm	36 mm
BLP -1/2"-13 UNC		1.5	0.75	3.0	1.5	1.0	0.75	1.1	1.5	1.1	20 Ft.Lbs	1 1/2"
BLP -M16 x 2		3.0	1.5	6.0	3.0	2.1	1.5	2.1	3.1	2.2	60 Nm	36 mm
BLP -5/8"-11 UNC		3.0	1.5	6.0	3.0	2.1	1.5	2.1	3.1	2.2	44 Ft.Lbs	1 1/2"
BLP -M20 x 2.5		5.0	2.5	10.0	5.0	3.5	2.5	3.5	5.2	3.7	90 Nm	50mm
BLP -3/4"-10 UNC		4.5	2.25	9.0	4.5	3.1	2.25	3.1	4.7	3.3	66 Ft.Lbs	2"
BLP -7/8"-9 UNC		6.0	3.0	12.0	6.0	4.2	3.0	4.2	6.3	4.5	66 Ft.Lbs	2"
BLP -M24 x 3		7.0	4.0	14.0	8.0	5.6	4.0	5.6	8.4	6.0	135 Nm	50mm
BLP -1"-8 UNC		7.0	4.0	14.0	8.0	5.6	4.0	5.6	8.4	6.0	100 Ft.Lbs	2"
BLP -M30 x 3.5		12.0	6.0	24.0	12.0	8.4	6.0	8.4	12.6	9.0	270 Nm	65 mm
BLP -1 1/4" -7 UNC		12.0	6.0	24.0	12.0	8.4	6.0	8.4	12.6	9.0	200 Ft.Lbs	2 5/8"
BLP -M36 x 4		14.0	8.0	28.0	16.0	11.2	8.0	11.2	16.8	12.0	320 Nm	65 mm
BLP -1 1/2" -6 UNC		14.0	8.0	28.0	16.0	11.2	8.0	11.2	16.8	12.0	236 Ft.Lbs	2 5/8"
BLP -M42 x 4.5		16.0	10.0	32.0	20.0	14.0	10.0	14.0	21.0	15.0	600 Nm	85 mm
BLP -1 3/4" -5 UNC		16.0	10.0	32.0	20.0	14.0	10.0	14.0	21.0	15.0	440 Ft.Lbs	3 1/8"
BLP -M48 x 5		18.0	13.0	36.0	26.0	18.2	13.0	18.2	27.3	19.5	800 Nm	85 mm
BLP -2"-4.5 UNC		18.0	13.0	36.0	26.0	18.2	13.0	18.2	27.3	19.5	590 Ft.Lbs	3 1/8"

* Safety factor 4:1

Ball-bearing Lifting Point BLP




Art. no.	Code	B	C	D	Dimensions in mm						Weight kg
					L	L1	M	X	Y	Z	
Z102008	BLP-M8 x 1.25	35	55	13	16	112	8	57	62	Ø42	0.6
Z102010	BLP -M10 x 1.5	35	55	13	20	112	10	57	61	Ø42	0.6
Z102012	BLP -M12 x 1.75	35	55	13	24	112	12	57	61	Ø42	0.6
Z102016	BLP-M16 x 2	35	55	13	30	112	16	57	61	Ø42	0.6
Z102020	BLP-M20 x 2.5	34	57	17	30	132	20	75	67	Ø59	1.3
Z102024	BLP-M24 x 3	50	70	17	36	145	24	75	84	Ø59	1.5
Z102030	BLP-M30 x 3.5	54	96	22	45	102	30	106	99	Ø74	3.4
Z102036	BLP-M36 x 4	54	96	22	54	102	36	106	99	Ø74	3.5
Z102042	BLP-M42 x 4.5	70	120	28	63	242	42	122	127	Ø93	6.5
Z102048	BLP-M48 x 5	70	120	28	72	242	48	122	127	Ø93	6.8

BLP with UNC thread




Art. no.	Code	B	C	D	Dimensions in mm						M inch	Weight kg
					L	L1	X	Y	Z			
Z102108	BLP-5/16"-18 UNC	35	55	13	16	112	57	61	Ø42	5/16"	0.6	
Z102110	BLP-3/8"-16 UNC	35	55	13	20	112	57	61	Ø42	3/8"	0.6	
Z102112	BLP-1/2"-13 UNC	35	55	13	24	112	57	61	Ø42	1/2"	0.6	
Z102116	BLP-5/8"-11 UNC	35	55	13	30	112	57	61	Ø42	5/8"	0.6	
Z102120	BLP-3/4"-10 UNC	34	57	17	30	132	75	67	Ø59	3/4"	1.3	
Z102121	BLP-7/8"-9 UNC	34	57	17	30	132	75	67	Ø59	7/8"	1.3	
Z102124	BLP-1"-8 UNC	50	70	17	38	145	75	84	Ø59	1"	1.5	
Z102130	BLP-1 1/4"-7 UNC	54	96	22	48	202	106	99	Ø74	1 1/4"	3.4	
Z102136	BLP-1 1/2"-6 UNC	54	96	22	57	202	106	99	Ø74	1 1/2"	3.6	
Z102142	BLP-1 3/4"-5 UNC	70	120	28	67	242	122	127	Ø93	1 3/4"	6.6	
Z102148	BLP-2"-4.5 UNC	70	120	28	76	242	122	127	Ø93	2"	7.0	

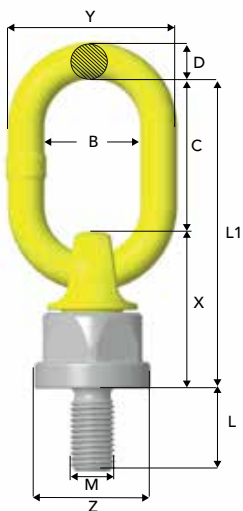


User advice


Instructions are available on our website gunneboindustries.com.

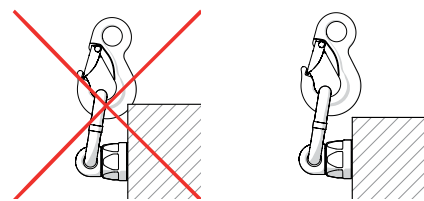

Make sure the D-ring does not lie against the load surface during lift.

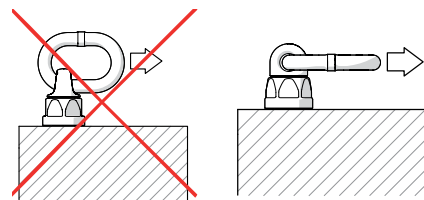

Never side-load the BLP.

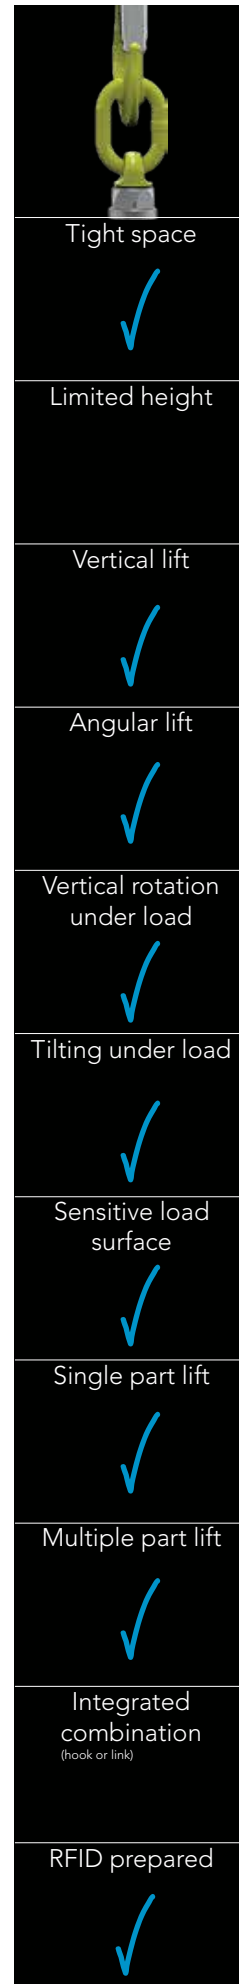

Measurements in mm unless other is stated

Other lifting points

Working Load Limits* WLP

Code	WLL tonnes*	2-leg		3- and 4-leg	
		α 0-90° β 0-45°	α 90-120° β 45-60°	α 0-90° β 0-45°	α 90-120° β 45-60°
WLP-2.5T	2.5	3.5	2.5	5.2	3.7
WLP-4T	4.0	5.6	4.0	8.4	6.0
WLP-7T	7.0	9.8	7.0	14.8	10.5
WLP-10T	10.0	14.1	10.0	21.2	15.0
WLP-16T	16.0	22.5	16.0	33.6	24.0

* Safety factor 4:1

Working Load Limits* SLP

Code	WLL tonnes*	2-leg		3- and 4-leg	
		α 0-90° β 0-45°	α 90-120° β 45-60°	α 0-90° β 0-45°	α 90-120° β 45-60°
SLP-1T	1.0	1.4	1.0	2.1	1.5
SLP-3T	3.0	4.2	3.0	6.3	4.5
SLP-5T	5.0	7.0	5.0	10.6	7.5

* Safety factor 4:1

Working Load Limits* ELP

Code	WLL tonnes*	2-leg		3- and 4-leg	
		α 0-90° β 0-45°	α 90-120° β 45-60°	α 0-90° β 0-45°	α 90-120° β 45-60°
ELP-16-8	1.0**	1.4	1.0	2.1	1.5
ELP-20-8	1.5**	2.1	1.5	3.1	2.3
ELP-24-8	2.0**	2.8	2.0	4.2	3.0
ELP-30-8	3.0**	4.2	3.0	6.3	4.5

* Safety factor 4:1

** In case of 1-leg application where loading is limited to straight loading in the direction of thread (no bending force) it is possible to use ELP with four times higher WLL.

Note! The above loads apply to normal usage and equally loaded legs. For asymmetric loaded chain slings, the following is recommended:


- A two-legged system is rated as a single-legged system.
- A three- or four-legged system is rated as a two-legged system.

Master Link D

CE

Art. no.	Code	WLL tonnes*	E	D	L	R	Weight kg
Z7008771	D-14-10	2.5	55	14	65	24	0.4
Z7008781	D-17-10	4.0	64	17	62	29	0.5
Z7008801	D-22-10	7.0	76	22	90	33	1.0
Z7008791	D-27-10	10.0	85	27	98	38	1.9
Z7008792	D-32-10	16.0	114	32	139	50	3.5

The load bearing width must be at least 0.5 x E.




Weldable Lifting Point WLP

CE

Art. no.	Code	WLL tonnes*	B	G	L	X	Weight kg
Z7009001	WLP-2.5T	2.5	50	27	53	95	0.5
Z7009011	WLP-4T	4.0	58	34	48	97	0.8
Z7009021	WLP-7T	7.0	64	41	73	135	1.8
Z7009031	WLP-10T	10.0	65	52	73	152	3.4
Z7009041	WLP-16T	16.0	90	66	105	203	6.7

Supplied with spring for stay up function.
 Master Link measurements, see Master Link D above.




Screw-on Lifting Point SLP

CE

Art. no.	Code	WLL tonnes*	B	C	H	L	M	X	Bolt protrusion	Weight kg
Z7009881	SLP-1T	1.0	50	72	98	54	M14	139	25	0.8
Z7009871	SLP-3T	3.0	58	84	114	49	M16	144	28	1.3
Z7009861	SLP-5T	5.0	64	116	160	71	M20	203	34	2.6

Supplied with bolt and spring for stay up function.
 Bolt according to: ISO 898-1 Class 10.9.
 Master Link measurements, see Master Link D above.

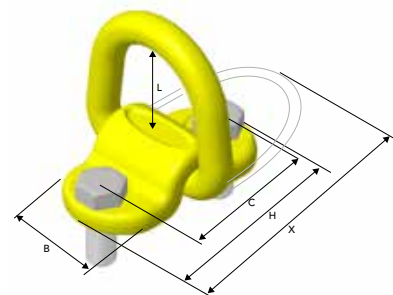


Eye Lifting Point ELP

CE

Art. no.	Code	WLL tonnes*	B	D	G	H	L	M	Weight kg
Z100434	ELP-16-8	1.0**	72	16	42	55	24	M16	0.4
Z100435	ELP-20-8	1.5**	72	16	42	58	30	M20	0.4
Z100436	ELP-24-8	2.0**	88	19	48	69	36	M24	0.9
Z100437	ELP-30-8	3.0**	106	22	60	84	45	M30	1.4

** In case of 1-leg application where loading is limited to straight loading in the direction of thread (no bending force) it is possible to use ELP with four times higher WLL.



* Safety factor 4:1

Spare Parts

Standard length bolt and long bolt for RLP and DLP are available as spare parts

RDRLP Metric

Standard length bolt incl. locking ring

Art. no.	Code
Z1017081	RDRLP-M8x1,25
Z1017101	RDRLP-M10x1,5
Z1017121	RDRLP-M12x1,75
Z1017161	RDRLP-M16x2
Z1017201	RDRLP-M20x2,5
Z1017241	RDRLP-M24x3
Z1017301	RDRLP-M30x3,5
Z1017361	RDRLP-M36x4
Z1017421	RDRLP-M42x4,5
Z1017481	RDRLP-M48x5



RDRLP Metric

Long bolt incl. nut, locking ring and washer

Art. no.	Code
Z10170801L	RDRLP-M8 LB
Z10171001L	RDRLP-M10 LB
Z10171201L	RDRLP-M12 LB
Z10171601L	RDRLP-M16 LB
Z10172001L	RDRLP-M20 LB
Z10172401L	RDRLP-M24 LB
Z10173001L	RDRLP-M30 LB
Z10173601L	RDRLP-M36 LB
Z10174201L	RDRLP-M42 LB
Z10174801L	RDRLP-M48 LB



RDRLP UNC

Standard length bolt incl. locking ring

Art. no.	Code
Z1018081	RDRLP-UNC 5/16"-18
Z1018101	RDRLP-UNC 3/8"-16
Z1018121	RDRLP-UNC 1/2"-13
Z1018161	RDRLP-UNC 5/8"-11
Z1018201	RDRLP-UNC 3/4"-10
Z1018211	RDRLP-UNC 7/8"-9
Z1018241	RDRLP-UNC 1"-8
Z1018301	RDRLP-UNC 1 1/4"-7
Z1018361	RDRLP-UNC 1 1/2"-6
Z1018421	RDRLP-UNC 1 3/4"-5
Z1018481	RDRLP-UNC 2"-4.5



RDRLP UNC

Long bolt incl. nut, locking ring and washer

Art. no.	Code
Z10180801L	RDRLP-UNC 5/16"-18 LB
Z10181001L	RDRLP-UNC 3/8"-16 LB
Z10181201L	RDRLP-UNC 1/2"-13 LB
Z10181601L	RDRLP-UNC 5/8"-11 LB
Z10182001L	RDRLP-UNC 3/4"-10 LB
Z10182101L	RDRLP-UNC 7/8"-9 LB
Z10182401L	RDRLP-UNC 1"-8 LB
Z10183001L	RDRLP-UNC 1 1/4"-7 LB
Z10183601L	RDRLP-UNC 1 1/2"-6 LB
Z10184201L	RDRLP-UNC 1 3/4"-5 LB
Z10184801L	RDRLP-UNC 2"-4.5 LB



RDDL Metric

Standard length bolt incl. locking ring

Art. no.	Code
Z1022081	RDDL M8x1.25
Z1022101	RDDL M10x1.5
Z1022121	RDDL M12x1.75
Z1022161	RDDL M16x2
Z1022201	RDDL M20x2.5
Z1022241	RDDL M24x3
Z1022301	RDDL M30x3.5
Z1022361	RDDL M36x4
Z1022421	RDDL M42x4.5
Z1022481	RDDL M48x5



RDDL Metric

Long bolt incl. nut, locking ring and washer

Art. no.	Code
Z10220801L	RDDL M8x1.25 LB
Z10221001L	RDDL M10x1.5 LB
Z10221201L	RDDL M12x1.75 LB
Z10221601L	RDDL M16x2 LB
Z10222001L	RDDL M20x2.5 LB
Z10222401L	RDDL M24x3 LB
Z10223001L	RDDL M30x3.5 LB
Z10223601L	RDDL M36x4 LB
Z10224201L	RDDL M42x4.5 LB
Z10224801L	RDDL M48x5 LB



RDDL UNC

Standard length bolt incl. locking ring

Art. no.	Code
Z1023081	RDDL UNC 5/16"-18
Z1023101	RDDL UNC 3/8"-16
Z1023121	RDDL UNC 1/2"-13
Z1023161	RDDL -UNC 5/8"-11
Z1023201	RDDL -UNC 3/4"-10
Z1023211	RDDL -UNC 7/8"-9
Z1023241	RDDL -UNC 1"-8
Z1023301	RDDL -UNC 1 1/4"-7
Z1023361	RDDL UNC 1 1/2"-6
Z1023421	RDDL -UNC 1 3/4"-5
Z1023481	RDDL -UNC 2"-4.5



RDDL UNC

Long bolt incl. nut, locking ring and washer

Art. no.	Code
Z10230801L	RDDL UNC 5/16"-18 LB
Z10231001L	RDDL UNC 3/8"-16 LB
Z10231201L	RDDL UNC 1/2"-13 LB
Z10231601L	RDDL UNC 5/8"-11 LB
Z10232001L	RDDL UNC 3/4"-10 LB
Z10232101L	RDDL UNC 7/8"-9 LB
Z10232401L	RDDL UNC 1"-8 LB
Z10233001L	RDDL UNC 1 1/4"-7 LB
Z10233601L	RDDL UNC 1 1/2"-6 LB
Z10234201L	RDDL UNC 1 3/4"-5 LB
Z10234801L	RDDL UNC 2"-4.5 LB



Waar kunt u ons vinden?

Wij zijn gevestigd te Meppel, centraal gelegen tussen de snelwegen A32 en A28. Dankzij deze optimale ligging kunnen wij u altijd de beste service bieden. Tevens zijn wij 24/7 bereikbaar in geval van calamiteiten.

Tevens bieden wij samen met onze transportpartners een haal- en brengservice, zodat u geen kostbare tijd verliest.



LiftingPlus
Hijzen met visie

Liftingplus BV
Eekhorstweg 21
7942 JC Meppel

T 0522 82 09 05
E info@liftingplus.nl

liftingplus.nl